




Double row angular contact ball bearing for rolling mill

Dalian Goldbull Bearing Co.,Ltd


www.gb-bearing.com

Double row angular contact ball bearing for rolling mill

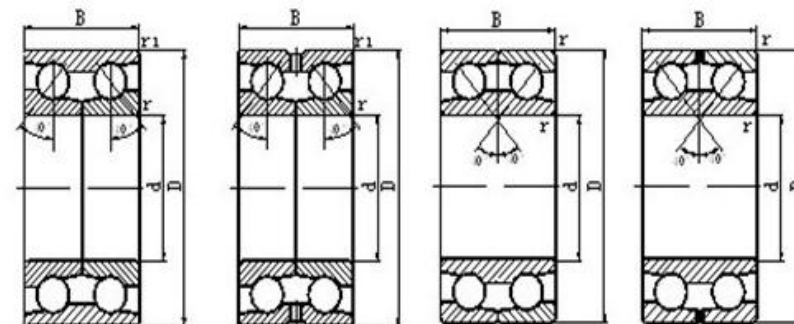


Bearing Designations		Principal Dimensions (mm)				Basic load rating (kN)		Speed ratings (rpm)		Reference	Weight (kg)
Old spec	Designations	d	D	B	r _{12min}	Dynamic (Cr)	Static (Cor)	Grease	Oil	SKF	
4086124	4024D	120	180	60	2	185	218	1800	2800		6.3
86724	4024X3DM	120	190	66	2	190	240	1900	2800	305256D	6.6
	4026X2DM	130	200	75	2	150	200	2200	3200		8.29
86728	4928X3DM	140	209.5	66	2	178	250	1700	2400	309515D	7.9
156728		140	209.5	66	2	178	250	1700	2400		7.4
4086128	4028DM	140	210	69	2	200	250	1700	2400		8.9
4086130	4030DM	150	225	75	2.1	199	204	1600	2200		9.5
86730	4030X2DYM	150	225	73	2.1	199	275	1600	2200	305286D	9.4
86830	4030X3DM	150	230	70	2.1	222	305	1600	2200	305283D	10
4086132K		160	240	58	2.1	234	245	1500	2000		9.6
156132	4032X2DM	160	240	76	2.1	234	335	1500	2000	305183	11
4086132	4032DM	160	240	80	2.1	234	367	1500	2000		12.2
156134	4034X2DM	170	260	84	2.1	281	405	1400	1900	305180	15
4086134	4034DM	170	260	90	2.1	281	405	1400	1900		17.5

Double row angular contact ball bearing for rolling mill

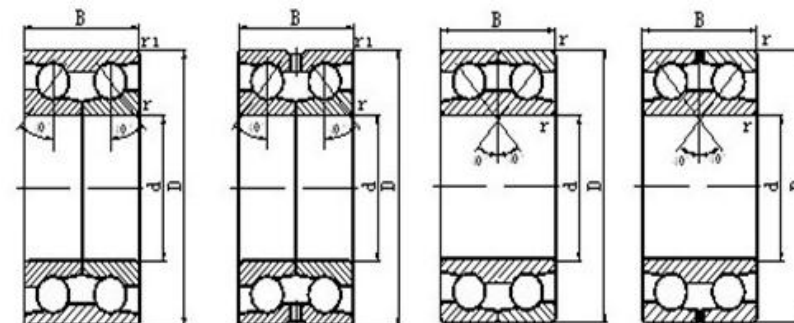


Bearing Designations		Principal Dimensions (mm)				Basic load rating (kN)		Speed ratings (rpm)		Reference	Weight (kg)
Old spec	Designations	d	D	B	r _{12min}	Dynamic (Cr)	Static (Cor)	Grease	Oil	SKF	
86736	4936X3DM	180	259.5	66	2.1	265	400	1400	1900	305262D	11
156136	4036X2DM	180	280	92	2.1	320	480	1300	1800	305172B	21.9
4086136	4036DM	180	280	100	2.1	320	480	1300	1800		25.3
86738	4938X3DM	190	269.5	66	2.1	270	415	1300	1800	305338D	11
156138	4038X2DM	190	290	92	2.1	325	510	1200	1700	305178	20.5
4086138	4038DM	190	290	100	2.1	325	510	1200	1700		24
86740	4940X3DM	200	279.5	76	2.1	242	380	1200	1700	305428D	13
86840	4940X3D-1M	200	289.5	76	2.1	302	475	1200	1700	305263DA	15.5
156140	4040X2DM	200	310	96	2.1	358	560	1100	1600	305352	25.5
4086140	4040DM	200	310	109	2.1	358	560	1100	1600		29.2
86744	4944X3DM	220	309.5	76	3	312	520	1000	1500	305272D	17
4086144	4044DM	220	340	118	3	330	560	1000	1500		36.7
86746	4946X1M	230	329.5	80	3	351	600	950	1400	305264DA	21

Double row angular contact ball bearing for rolling mill

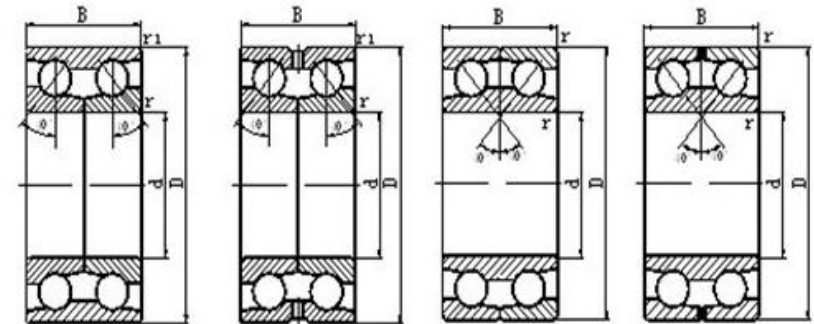

Bearing Designations		Principal Dimensions (mm)				Basic load rating (kN)		Speed ratings (rpm)		Reference	Weight (kg)
Old spec	Designations	d	D	B	r _{12min}	Dynamic (C _r)	Static (C _{0r})	Grease	Oil	SKF	
4086148K	4948X1DM	240	359.5	118	3	425	650	240	900		39.4
4086148	4048DM	240	360	118	3	425	650	900	1300		40
86748K	4048X3DM	240	370	112	3	460	680	900	1300		44
86748	4948X2DM	240	440	114	3	530	750	900	1300		77
86752	4952X3DM	260	369.5	92	3	397	710	850	1200	305270D	30
156152	4052X2DM	260	400	130	4	436	735	850	1200		60
4086152	4052DM	260	400	140	4	436	735	850	1200		64
86756K	4956X3D-1M	280	389.5	92	4	403	750	850	1200	305269D	31.5
86756	4956X3DM	280	390	92	4	403	750	850	1200		33
156156	4056X2DM	280	420	130	4	460	810	850	1200		59
4086156	4056DM	280	420	140	4	475	830	850	1200		63
86760	4960X3DM	300	419.5	112	2.1	423	791	700	1000		43
4086160	4060DM	300	460	160	4	485	860	800	1100		66
	4964X2DM	320	440	112	2.1	460	920	630	850		53.2
86764	4964X3DM	320	459.5	140	4	510	910	800	1100		75

Double row angular contact ball bearing for rolling mill

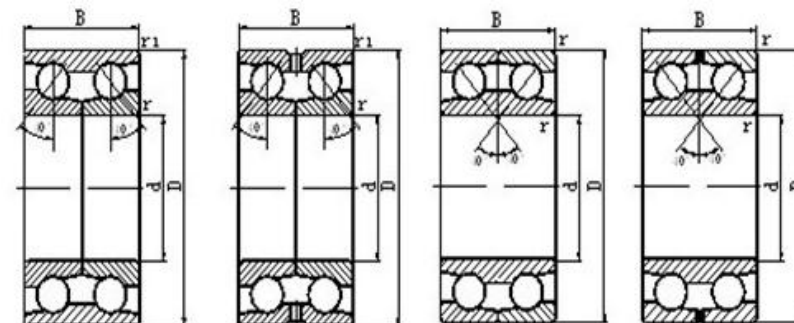

Bearing Designations		Principal Dimensions (mm)				Basic load rating (kN)		Speed ratings (rpm)		Reference	Weight (kg)
Old spec	Designations	d	D	B	r_{12min}	Dynamic (Cr)	Static (Cor)	Grease	Oil	SKF	
4086164	4064D	320	480	160	4	520	925	800	1100		102
4086168	4068D	340	520	180	5	610	1040	750	1000		130